




SOLIGOR[®]



Universal
Automatic

T-4

Lens System

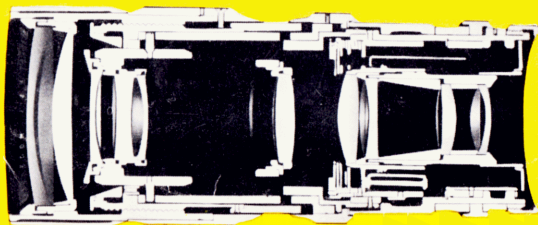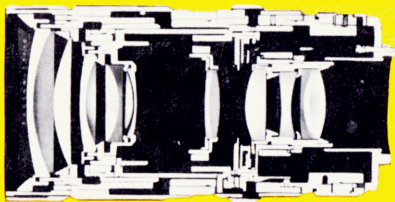

HOW TO USE THE SOLIGOR T4 UNIVERSAL AUTOMATIC SYSTEM

Operation of these lenses is extremely easy, simple and fast. To assure proper operation, follow these step by step instructions:

- 1) Open the mount retaining bayonet, by turning the outer ring (1) in a counter-clockwise direction as indicated by the arrow "O" (2).

- 2) Set the diaphragm control (3) opposite the reference mark (4) on the lens barrel.

Note: Lenses for Miranda, Petri, Nikon, Pentax, Exakta and Canon (yellow and red engraved mounts), operate over the range of black engraved diaphragm openings.


Lenses for Minolta, Leicaflex, Topcon and Icarex (green engraved) operate over the green engraved diaphragm openings.

- 3) For lenses which are coupled to the camera exposure system, note the mark on the T-4 lensmount "set pin here".

- 4) Alignment pin (5), indicated by an arrow on the T-4 mount, fits into the alignment slot (6) indicated by an arrow on the lens base. To permit the T-4 mount to seat properly into the lens base, turn the diaphragm control ring slightly to the left or right, holding the mount pressed down.

- 5) When the mount is in place, close the mount retaining ring by turning the ring (1) in a clockwise direction, as indicated by arrow "L" (7).

- 6) To remove the T-4 lensmount from the lens, push the lever (8) and turn the mount retaining ring (1) in a counter-clockwise direction (2) and lift the mount from the lens base.

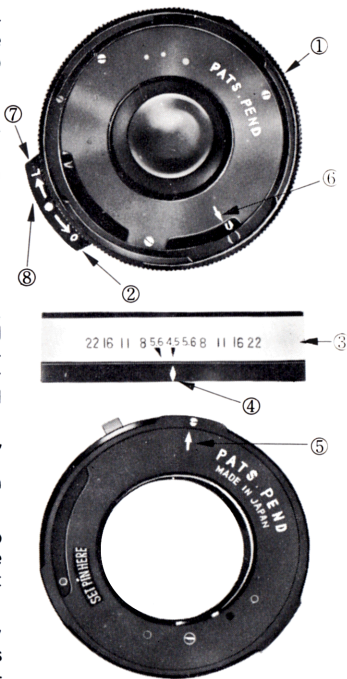

SPECIFICATIONS OF THE SOLIGOR T4 UNIVERSAL AUTOMATIC LENSES


21mm f3.8

Angle of view: 90°

Apertures: f3.8–16

Composition: 9 el/8 gr.

Filter size: 72mm




24mm f2.8

Angle of view: 84°

Apertures: f2.8–16

Composition: 8 el/7 gr.

Filter size: 67mm




28mm f2.8

Angle of view: 74°

Apertures: f2.8–16

Composition: 7 el/6 gr.

Filter size: 58mm




35mm f2.8

Angle of view: 64°

Apertures: f2.8–16

Composition: 6 el/5 gr.

Filter size: 49mm



105mm f2.8

Angle of view: 24°

Apertures: f2.8–22

Composition: 4 el/4 gr.

Filter size: 49mm



135mm f2.8

Angle of view: 18°

Apertures: f2.8–22

Composition: 4 el/4 gr.

Filter size: 55mm



135mm f3.5

Angle of view: 18°

Apertures: f3.5–22

Composition: 4 el/4 gr.

Filter size: 49mm




200mm f3.5

Angle of view: 12°

Apertures: f3.5–22

Composition: 5 el/4 gr.

Filter size: 62mm



300mm f5.5

Angle of view: 8°

Apertures: f5.5–22

Composition: 5 el/3 gr.

Filter size: 62mm




400mm f6.3

Angle of view: 6°

Apertures: f6.3–22

Composition: 4 el/3 gr.

Filter size: 72mm




75-260mm f4.5

Angle of view: $31^{\circ}10' - 9^{\circ}30'$

Apertures: f4.5–22

Composition: 13 el/10 gr.

Filter size: 67mm

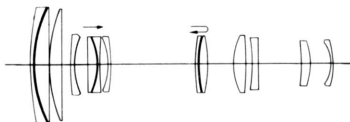


90-230mm f4.5

Angle of view: $27^{\circ} - 12^{\circ}$

Apertures: f4.5–22

Composition: 11 el/7 gr.

Filter size: 58mm



**THERE'S A SOLIGOR
LENS FOR YOU!**

**SOLIGOR
C/D
T-4
T-2
FA
LENSES**



SOLIGOR "Excellence in Optics"

SOLIGOR T4 UNIVERSAL AUTOMATIC LENSES

The Soligor T4 Universal Automatic Lenses represent the ultimate in interchangeable precision optics. Soligor lenses are manufactured in accordance with the strictest and most rigid optical engineering standards, and the outstanding quality of Soligor optics has been endorsed by their worldwide acceptance and popularity.

This latest Soligor development, the T4 Universal Automatic lens, features high quality optics with a range of interchangeable T-4 mounts, coupling to the automatic diaphragm mechanism of practically all 35mm SLR cameras. Where exposure systems are incorporated, they couple also to the metering system, making them the most versatile in the world. Yet, Soligor lenses are modestly priced to fit any budget.

3 YEAR FULL GUARANTEE


SOLIGOR *World's Finest*

**INTERCHANGEABLE LENSES
FOR 35 mm S.L.R. CAMERAS**

OTHER WORLD FAMOUS SOLIGOR INTER-CHANGEABLE OPTICS

AUTOMATIC LENSES with fixed mounts, available in a range of focal lengths from 17mm to 400mm. These lenses couple to the following camera systems: Pentax (Praktica), Nikon, Canon, Minolta, Miranda, Exakta, Topcon, Konica and Petri. **PRESET LENSES** with interchangeable T-2 mount system in a range of focal lengths from 25mm – 800mm are available. These lenses can be operated on all 35mm SLR cameras.

Furthermore, enlarging lenses, ITV and 16mm Cine lenses, Teleconverters and Fisheye converters are available in the Soligor optical system.

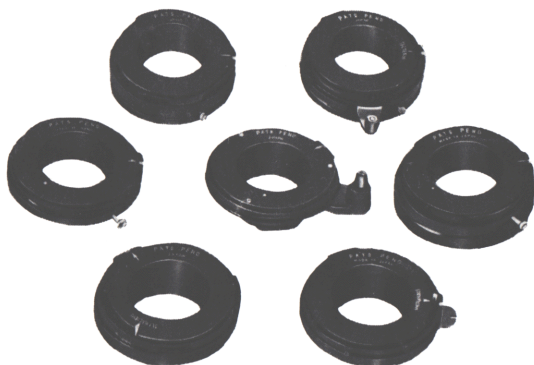

**ANOTHER QUALITY PRODUCT OF
ALLIMATSU CORP.**

Tokyo, Japan