


# f=24mm V-DSLR ED AS IF UMC (for Cinema)

SPECIFICATIONS		1:1.5 24mm ED AS IF UMC									
APERTURE RANGE(T-STOP)		T1.5 to T22									
OPTICAL CONSTRUCTION		13 ELEMENTS IN 12 GROUPS (2 ASPHERICAL LENS)									
MINIMUM FOCUSING DISTANCE		0.25m(0.85ft)									
FILTER SIZE		φ77.0mm									
FRONT DIAMETER		φ83.0mm									
MOUNT		NIKON	CANON EOS	PENTAX K	SONY α	CANON M	FUJIFILM X	SAMSUNG NX	SONY E	FOUR-THIRDS	MICRO FOUR-THIRDS
ANGLE OF VIEW	35mm	84.1°	84.1°	84.1°	84.1°	-	-	-	-	-	-
	APS-C	61.8°	57.6°	61.8°	61.8°	61.8°	61.8°	61.8°	61.8°	-	-
	FOUR-THIRDS 4/3"	-	-	-	-	-	-	-	-	47.6°	47.6°
LENGTH(LENS MOUNT TO FRONT)		95mm	97.5mm	96mm	97mm	123.4mm	123.8mm	116mm	123.5mm	102.8mm	122.3mm
WEIGHT(CAP,HOOD DETACHABLE)		600g	615g	600g	609g	630g	640g	630g	640g	630g	635g
GEAR	MODULE	0.8									
	A	7mm									
	B	4mm									
	C	43.8mm									
	D	8mm	10.5mm	9mm	10mm	36.4mm	36.8mm	29mm	36.5mm	15.8mm	35.3mm
	FOCUS DIAMETER	φ81.6mm									
	APERTURE DIAMETER	φ70.4mm	φ73.6mm								

Drawing

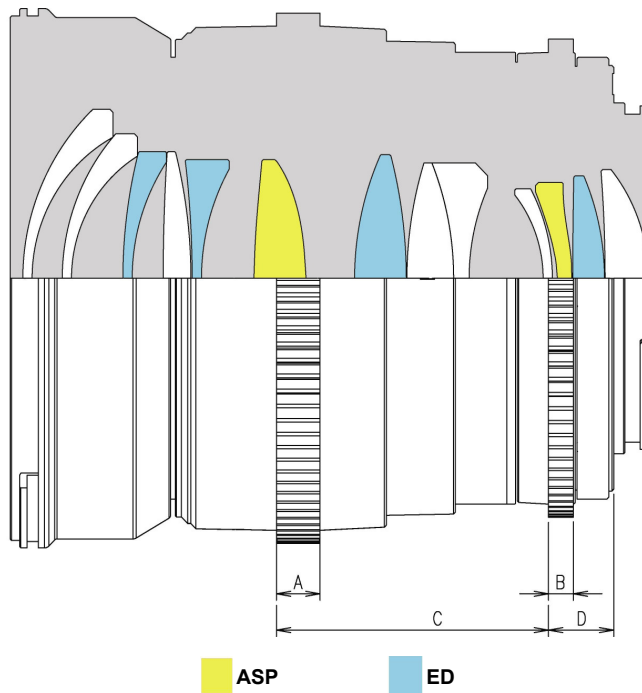

**SAMYANG**

Samyang Optics R&D Center  
Copyright © 2013-0