


f=100mm V-DSLR ED UMC MACRO (for Cinema)

SPECIFICATIONS		1:3.1 100mm ED UMC MACRO									
APERTURE RANGE(T-STOP)		T3.1 to T32									
OPTICAL CONSTRUCTION		15 ELEMENTS IN 12 GROUPS									
MINIMUM FOCUSING DISTANCE		0.307m(1.0ft)									
FILTER SIZE		Φ67mm									
MAXIMUM DIAMETER		Φ81.6mm									
MOUNT		NIKON	CANON EOS	PENTAX K	SONY α	CANON M	FUJIFILM X	SAMSUNG NX	SONY E	FOUR-THIRDS	MICRO FOUR-THIRDS
ANGLE OF VIEW	35mm	24.8°	24.8°	24.8°	24.8°	-	-	-	24.8°	-	-
	APS-C	16.4°	15.4°	16.4°	16.4°	15.4°	16.4°	16.4°	16.4°	-	-
	FOUR-THIRDS 4/3"	-	-	-	-	-	-	-	-	12.6°	12.6°
LENGTH(LENS MOUNT TO FRONT)		120.6mm	123.1mm	121.6mm	122.6mm	149.0mm	149.4mm	141.6mm	149.1mm	128.4mm	147.9mm
WEIGHT(CAP,HOOD DETACHABLE)		710g	725g	715g	720g	735g	775g	725g	735g	740g	730g
GEAR	MODULE	0.8									
	A	7mm									
	B	4mm									
	C	43.8mm									
	D	8mm	10.5mm	9mm	10mm	36.4mm	36.8mm	29mm	36.5mm	15.8mm	35.3mm
	FOCUS DIAMETER	Φ81.6mm									
	APERTURE DIAMETER	Φ70.4mm	Φ73.6mm								

Drawing

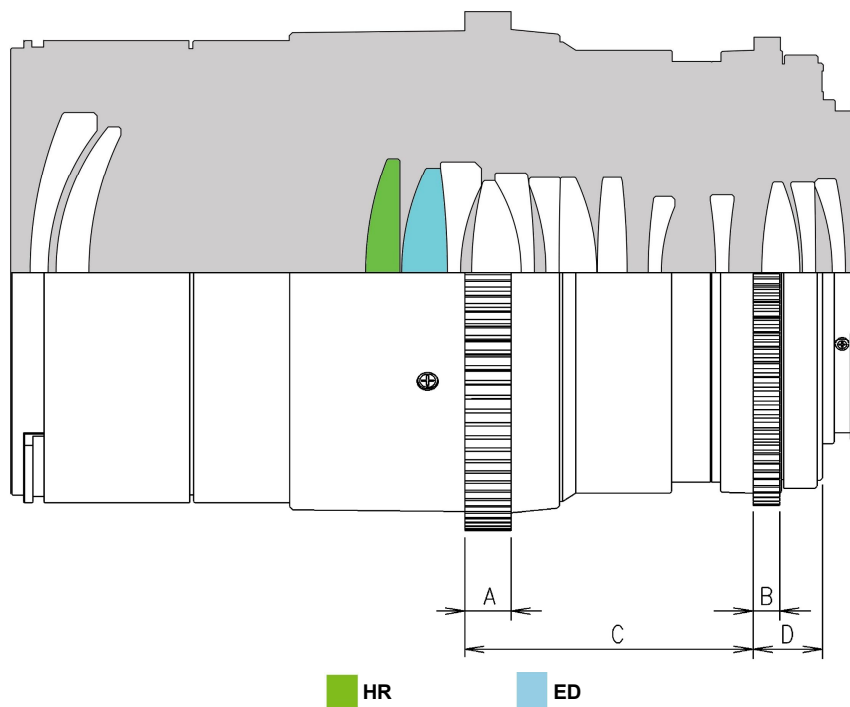

SAMYANG

Samyang Optics R&D Center
Copyright © 2015-0