

Heligon 1:1,6 f = 100 mm

Cat. No. / Bestell-Nr. 3801.280.020

ON 4305 - 9102

E = -0.023

BETA' = 0.0000
SCALE

BLENDENDURCHMESSER = 62.53
F-STOP DIAMETER

f' = 100.103


ORTSFREQUENZ: 40. 20. 10. 1/mm
SPATIAL FREQUENCY:

BLLENDE = 1.60
F-NUMBER

p20p(T)	LAM	446.0	498.0	550.0	602.0	654.0				
	BEW	3.8	17.5	66.5	96.3	88.6	44.3	25.6	13.8	5.9

* = BEUGUNGSTHEORETISCHER WERT
DIFFRACTION LIMITED VALUE

— SAGITTAL
- - - MERIDIONAL

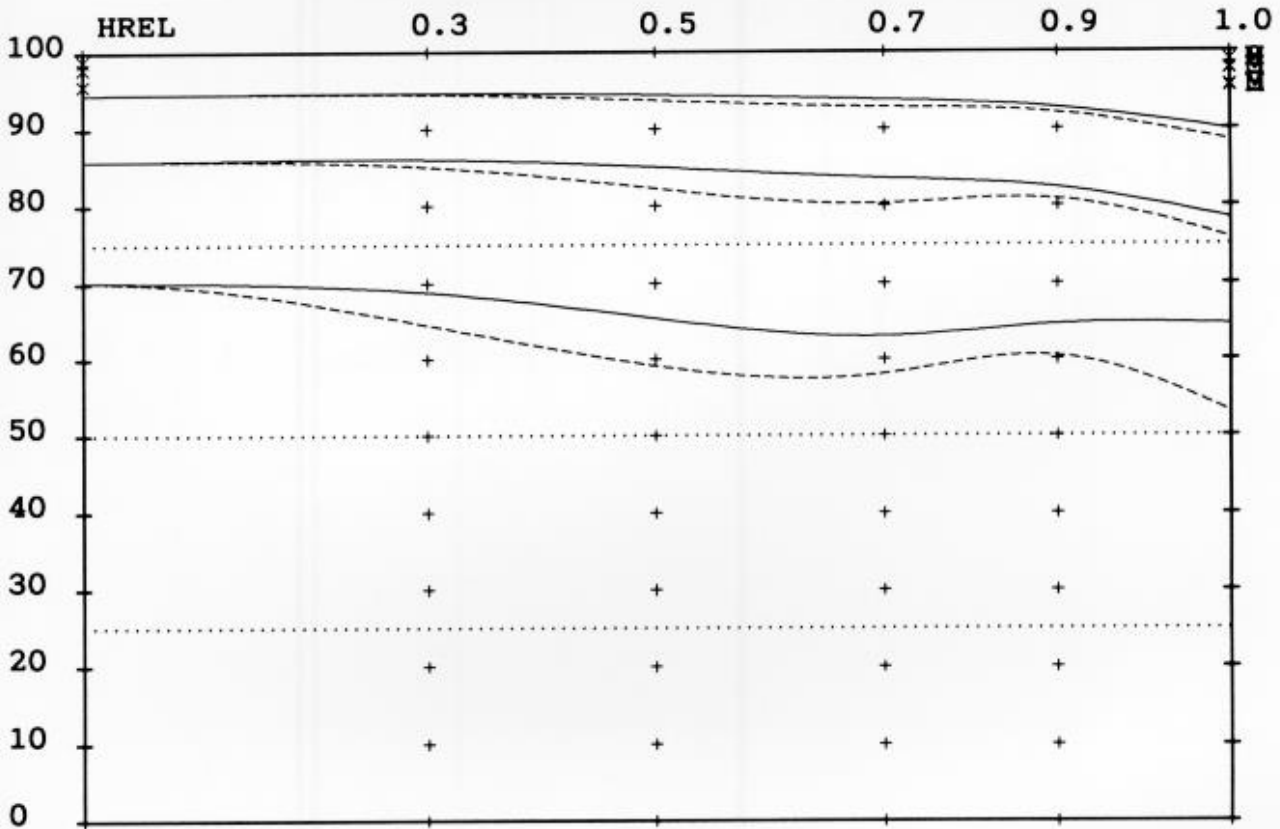

Y' = 0 (MITTE)	3.752	6.257	8.766	10.653	12.543
Y' = 0 (AXIS)					
WINKEL (GRAD)	2.15	3.58	5.00	6.06	7.13
ANGLE (DEGREE)					
HELLIGKEIT (%)	98	98	98	98	97
LIGHT INTENSITY (%)					
VERZEICHNUNG (O/OO)	0.31	0.86	1.66	2.41	3.26
DISTORTION (0.1%)					